

# Industrial paint booths for furniture

# ONE TECH

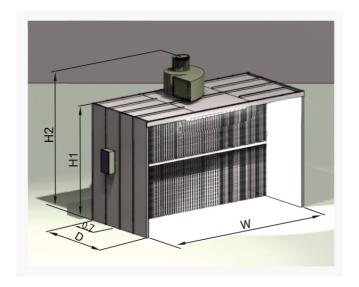

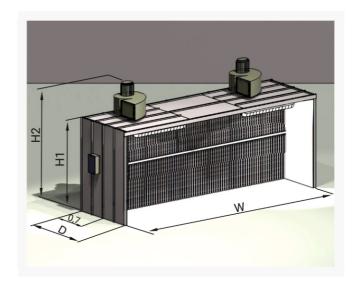

# Open type paint booths


| Booth<br>model | Overall dimensions |                 |                   |                   | Ventilation system |                  | Filtration system   |                             | l inhain a d                          |
|----------------|--------------------|-----------------|-------------------|-------------------|--------------------|------------------|---------------------|-----------------------------|---------------------------------------|
|                | W, m<br>(width)    | D, m<br>(depth) | H1, m<br>(height) | H2, m<br>(height) | Exhaust fan,<br>kW | Airflow,<br>m3/h | 1st stage           | 2nd stage                   | Lighting *                            |
| NT - 2         | 2,1                | 2               | 2,4               | 3,1               | 1 x 2,2            | 10 800           | cardboard<br>filter | glass fiber<br>"paint stop" | 1 light<br>(2 LED lamps of 18W each)  |
| NT - 3         | 3,1                | 2               | 2,4               | 3,1               | 1 x 2,2            | 10 800           | cardboard<br>filter | glass fiber<br>"paint stop" | 1 light<br>(2 LED lamps of 18W each)  |
| NT - 4         | 4,1                | 2               | 2,4               | 3,2               | 1 x 4              | 14 000           | cardboard<br>filter | glass fiber<br>"paint stop" | 2 lights<br>(4 LED lamps of 18W each) |
| NT - 5         | 5,1                | 2               | 2,4               | 3,1               | 2 x 2,2            | 21 600           | cardboard<br>filter | glass fiber<br>"paint stop" | 2 lights<br>(4 LED lamps of 18W each) |
| NT - 6         | 6,1                | 2               | 2,4               | 3,1               | 2 x 2,2            | 21 600           | cardboard<br>filter | glass fiber<br>"paint stop" | 2 lights<br>(4 LED lamps of 18W each) |

### \* Explosion-proof

# Open type paint booths with carbon filtration

| Booth<br>model | Overall dimensions |                 |                   |                   | Ventilation system |                  | Filtration system   |                           |                                       |
|----------------|--------------------|-----------------|-------------------|-------------------|--------------------|------------------|---------------------|---------------------------|---------------------------------------|
|                | W, m<br>(width)    | D, m<br>(depth) | H1, m<br>(height) | H2, m<br>(height) | Exhaust fan,<br>kW | Airflow,<br>m3/h | 1st stage           | 2nd stage                 | Lighting *                            |
| NT - 2C        | 2,1                | 2               | 2,4               | 3,1               | 1 x 2,2            | 10 800           | cardboard<br>filter | carbon filter<br>(100 kg) | 1 light<br>(2 LED lamps of 18W each)  |
| NT - 3C        | 3,1                | 2               | 2,4               | 3,1               | 1 x 2,2            | 10 800           | cardboard<br>filter | carbon filter<br>(150 kg) | 1 light<br>(2 LED lamps of 18W each)  |
| NT - 4C        | 4,1                | 2               | 2,4               | 3,2               | 1 x 4              | 14 000           | cardboard<br>filter | carbon filter<br>(200 kg) | 2 lights<br>(4 LED lamps of 18W each) |
| NT - 5C        | 5,1                | 2               | 2,4               | 3,1               | 2 x 2,2            | 21 600           | cardboard<br>filter | carbon filter<br>(250 kg) | 2 lights<br>(4 LED lamps of 18W each) |
| NT - 6C        | 6,1                | 2               | 2,4               | 3,1               | 2 x 2,2            | 21 600           | cardboard<br>filter | carbon filter<br>(300 kg) | 2 lights<br>(4 LED lamps of 18W each) |

### \* Explosion-proof

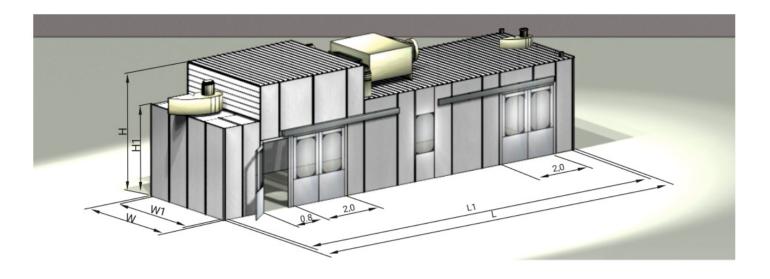

| Pressurized            | l system                   |   |   |   |   |   |  |  |  |  |
|------------------------|----------------------------|---|---|---|---|---|--|--|--|--|
| Technical chara        | acteristics                | NT - 412 NT - 512   |   | NT - 612                                | NT - 514                                | NT - 614                                |  |  |  |  |
| External dimensions    | L, m (length)              | 12,1  | 12,1  | 12,1                                    | 14,1                                    | 14,1                                    |  |  |  |  |
|                        | W, m (width)               | 4,1   | 5,1   | 6,1                                     | 5,1                                     | 6,1                                     |  |  |  |  |
|                        | H, m (height)              | 4,0   | 4,0   | 4,0                                     | 4,0                                     | 4,0                                     |  |  |  |  |
| Internal<br>dimensions | L1, m (length)             | 12,0 (6,0 + 6,0)  | 12,0 (6,0 + 6,0)                            | 12,0 (6,0 + 6,0)                        | 14,0 (7,0 + 7,0)                        | 14,0 (7,0 + 7,0)                        |  |  |  |  |
|                        | W1, m (width)              | 4,0   | 5,0   | 6,0                                     | 5,0                                     | 6,0                                     |  |  |  |  |
|                        | H1, m (height)             | 2,7   | 2,7   | 2,7                                     | 2,7                                     | 2,7                                     |  |  |  |  |
| Front doors            |                            | Sliding doors in the paint and drying zones. Dimensions (LxH): 2,0x2,0 m                          |   |   |   |   |  |  |  |  |
| Internal doors         |                            | Sliding doors between the paint and drying zones. Dimensions (LxH): 2,0x2,0 m                     |   |   |   |   |  |  |  |  |
| Emergency doors        |                            | 1 swing door on the side of the front door in the paint zone. Dimensions (LxH): 0,8x2,0 m         |   |   |   |   |  |  |  |  |
| Inspection window      |                            | One on the side of the front door in the drying zone  |   |   |   |   |  |  |  |  |
| Lighting               | Paint zone                 | 6 lights<br>(24 LED lamps of 18W each)  | 6 lights<br>(24 LED lamps of 18W each)      | 6 lights<br>(24 LED lamps of 18W each)  | 8 lights<br>(32 LED lamps of 18W each)  | 8 lights<br>(32 LED lamps of 18W each)  |  |  |  |  |
|                        | Drying zone                | 4 lights<br>(16 LED lamps of 18 W each)   | 4 lights<br>(16 LED lamps of 18 W each)     | 4 lights<br>(16 LED lamps of 18 W each) | 4 lights<br>(16 LED lamps of 18 W each) | 4 lights<br>(16 LED lamps of 18 W each) |  |  |  |  |
|                        | Intake fan<br>(paint zone) | 1 x 5,5 kW; 22 000 m3/h   | 1 x 7,5 kW; 24 000 m3/h                     | 1 x 11 kW; 30 000 m3/h                  | 1 x 7,5 kW; 24 000 m3/h                 | 1 x 11W; 30 000 m3/h                    |  |  |  |  |
| Intake and             | Exhaust fan (paint zone)   | 1 x 4 kW; 13 700 m3/h   | 1 x 2,2 kW; 16 600 m3/h                     | 1 x 3 kW; 20 000 m3/h                   | 1 x 2,2 kW; 16 600 m3/h                 | 1 x 3 kW; 20 000 m3/h                   |  |  |  |  |
| exhaust<br>ventilation | Exhaust fan (drying zone)  | 1 x 2,2 kW; 5 600 m3/h  | 1 x 2,2 kw; 8 300 m3/h 1 x 2,2 kW; 8 300 m3 |   | 1 x 2,2 kW; 8 300 m3/h                  | 1 x 2,2 kW; 8 300 m3/h                  |  |  |  |  |
|                        | Heat power                 | 138 kW  | 154 kW                                      | 172 kW 154 kW                           |   | 172 kW                                  |  |  |  |  |
|                        | Notice                     | Electrical heating elements. Optional hot water heating.  |   |   |   |   |  |  |  |  |
| Prime filter           |                            | M filter class according to EN 779 (prefiltration of supply air)                                  |   |   |   |   |  |  |  |  |
| Intake air filter      |                            | F5 filter class according to EN 779 (filtration of supply air)                                    |   |   |   |   |  |  |  |  |
| Exhaust air filter     |                            | G3 filter class according to EN 779 (paint mist filtration )                                      |   |   |   |   |  |  |  |  |
| Total power            |                            | 151 kW  | 169 kW                                      | 192 kW                                  | 169 kW                                  | 192 kW                                  |  |  |  |  |
| Power supply           |                            | 380V/50hz/3-phase   | 380V/50hz/3-phase                           | 380V/50hz/3-phase                       | 380V/50hz/3-phase                       | 380V/50hz/3-phase                       |  |  |  |  |
| Wall panels, doors     |                            | EPS panel (thickness is 50 mm); default colour is white, other colours are possible upon request. |   |   |   |   |  |  |  |  |
|                        |                            |   |   |   |   | 100000000000000000000000000000000000000 |  |  |  |  |



Your regional distributor



info@onetech-tools.com



www.onetech-tools.com